

general design information

Made in Gummersbach, Germany

ABUS
Kransysteme GmbH,
Gummersbach Works



Modern
production plant



View into the
production plant



The success of ABUS is based on consistent standardization of the product range with the aim of series production. Customer-oriented marketing and ABUS development work ensure that the standard range is continuously developed to reflect market requirements.

1964: Production of the first jib crane. Shortly afterwards, first major order (for 27 jib cranes)

- 1965: Construction of Lantenbach production plant near Gummersbach; ABUS has a staff of 20
- 1973/74: ABUS draws conclusions from the world-wide recession: expansion of series production for increased cost-effectiveness
- 1982: ABUS has a staff of 110
- 1984: The year of innovations – HB system – ABUS electric wire rope hoist – ABUS electric chain hoist
- 1987: Expansion. Construction of a second production plant at Marienheide, near Gummersbach.
- 1989: Construction of advanced factory at Rodt, near Gummersbach
- 1991/92: ABUS has a staff of 550
- 1992/93: Systematic expansion of exports. ABUS Representative Office established in Singapore. Another consultant develops the Middle East market.
- 1993: World-wide recession: ABUS remains successful thanks to flexible extension of the standard range and expansion of the sales network: 20 representatives in Germany, about 40 sales partners world-wide.
- 1994: ELS: Single girder crane with side running trolley (Type S)
ABUS products with CE sign
Modular drive unit AZF 400
- 1995: ABUS Push button pendant
Modular drive unit AZF 500
- 1996: Standard operating hours meter on electric wire rope hoists
Load measuring system LIS-AV
Overload protection device LIS-SM
- 1997: Construction of new production plant "Lantenbach Nord" (11.000 m²)
Modular travel drive HBF
ABUS subsidiary in Shanghai (China)
- 1998: New painting system (Single-coat paintwork)
Load measuring system "ABUControl"
Mobile gantry LPK
Electric chain hoist "ABUCompact GMC"
Power supply via energy chain system
- 1999: Load indicator system LIS-SE
Profile HB100
- 2000: ABUS radio remote control system
- 2001: ABUS radio remote control system Mini-RC
- 2002: Electric chain hoist "ABUCompact GM2"
The electric wire rope hoist range has been extended up to 100 t SWL
- 2003: Electric chain hoist "ABUCompact GM8"
- 2004: Electric chain hoist "ABUCompact GM4"

ABUS system expertise: Individual materials handling from one source




ABUS crane systems and components:



Travelling Cranes



Jib Cranes



HB-System



LPK mobile gantry



Electric Wire Rope Hoists



Electric Chain Hoists



High-performance Components



ABUS offers you overhead lifting and materials handling technology from 80 kg up to 100 t from one source – from the stationary electric chain hoist to jib cranes, lightweight overhead systems, electric wire rope hoists, travelling cranes and including complete materials handling systems. All ABUS crane systems, hoists and components can be used as stand-alone units but they are also designed for smooth interaction with each other, from easy plug-in connections through to maintenance and spare part stocks. A customer who chooses ABUS systems can rely on ABUS absolutely.




General remarks on design						
Design basis	DIN 15018, H2/B3 indoor operation, without crane walkway without driver's cabin operating voltage 400 V / 50 Hz					
Crane travelling speed	EDL : 7.5/30 m/min ELV / ELK / ZLK : 10/40 m/min					
Trolley travelling speed	ELV / ELK / EDL / ZLK : 5/20 m/min Standard – other speeds are available					
Deflection	$\leq 1/750$ of span					
Natural frequencies	ELV / EDL : ≥ 2.5 Hz ELK / ZLK : see below					
	S [m]	$\leq$	23.0	25.0	28.0	32.0
	FE [Hz]	$\geq$	2.5	2.4	2.3	2.2




The measurements A1, C1 and K1 can be changed by adjusting to existing build conditions, by pushing up the bottom of the main girder up to the bottom of the end carriage.

For exact measurements please contact ABUS

ZLK Double Girder Cranes

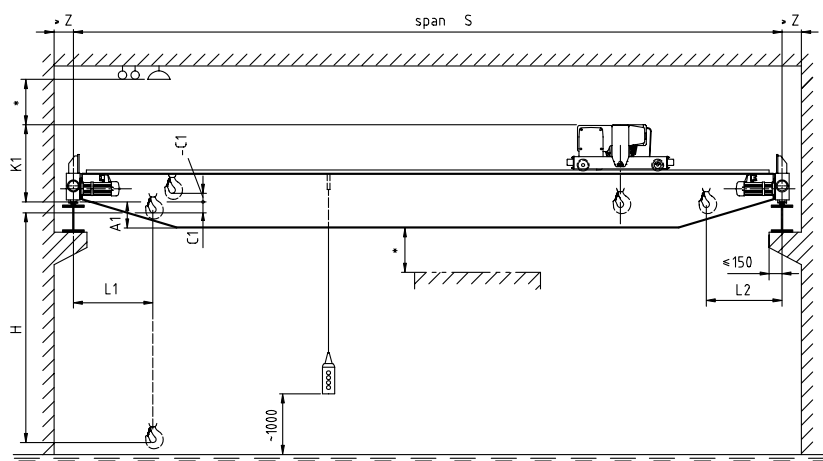


* Safety distance according to national regulations.

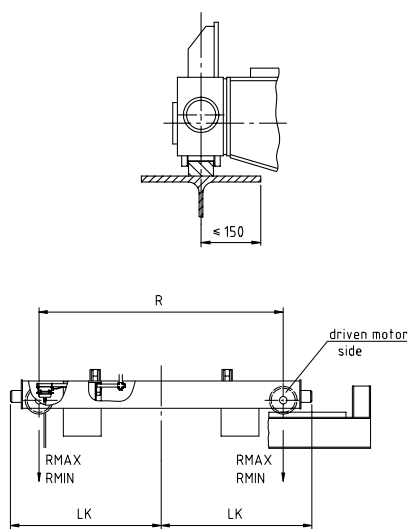


Dimensions of ZLK Double Girder Cranes

Load, Hoist Type ¹⁾	S ¹⁾ m	A1 mm	K1 mm	C1 mm	L1 mm	L2 mm	Zmin mm	Hmax ¹⁾ mm	R mm	LK mm	Wheel loads kN R max R min
5000 kg Rope hoist GM 1050 H6 FEM 2m	10	200	770	-50	650	650	150	9000	2700	1600	30.6 6.9
	14	300	770	-50	650	650	150	9000	2700	1600	33.5 8.7
	16	300	770	-50	650	650	150	9000	2700	1625	35.5 10.4
	18	400	770	-50	650	650	150	9000	2700	1625	37.5 12.1
	20	500	770	-50	650	650	150	9000	2900	1725	39.6 14.0
	22	460	810	-90	650	650	170	9000	3200	1895	42.7 17.0
	24	560	810	-90	650	650	170	9000	3800	2230	45.7 19.7
	26	500	870	-150	650	650	180	9000	4600	2650	50.7 24.4
	28	700	870	-150	650	650	180	9000	4600	2650	53.2 26.8
	30	700	870	-150	650	650	180	9000	4600	2650	57.2 30.7
V Hoist = 0.8/5 m/min	32	650	920	-200	650	650	180	9000	5100	2965	66.3 39.5
	34	660	920	-200	650	650	180	9000	5100	2965	71.7 44.9
6300 kg Rope hoist GM 2063 H6 FEM 1Am	10	200	770	-30	650	650	150	9000	2700	1600	36.9 7.4
	14	260	810	-70	650	650	170	9000	2700	1645	40.8 10.0
	16	360	810	-70	650	650	170	9000	2900	1745	43.0 11.8
	18	460	810	-70	650	650	170	9000	2900	1745	45.1 13.6
	20	460	810	-70	650	650	170	9000	2900	1745	46.4 14.7
	22	560	810	-70	650	650	170	9000	3200	1895	49.0 17.0
	24	500	870	-130	650	650	180	9000	3800	2250	55.0 22.7
	26	500	870	-130	650	650	180	9000	3800	2250	58.7 26.3
	28	700	870	-130	650	650	180	9000	4600	2650	61.9 29.3
	30	700	870	-130	650	650	180	9000	4600	2650	66.1 33.3
V Hoist = 0.8/5 m/min	32	660	920	-180	650	650	180	9000	5100	2965	76.0 42.9
	34	900	920	-180	650	650	180	9000	5100	2965	78.7 45.6
8000 kg Rope hoist GM 3080 H6 FEM 3m	10	260	900	-30	750	750	170	10000	2700	1620	46.1 9.3
	14	360	900	-30	750	750	170	10000	2700	1645	50.1 11.4
	16	460	900	-30	750	750	170	10000	2900	1745	52.4 13.1
	18	460	900	-30	750	750	170	10000	2900	1745	53.9 14.2
	20	460	900	-30	750	750	170	10000	2900	1745	56.6 16.4
	22	560	900	-30	750	750	170	10000	3200	1930	59.3 18.9
	24	500	960	-90	750	750	180	10000	3800	2250	65.8 25.0
	26	700	960	-90	750	750	180	10000	3800	2250	68.5 27.5
	28	700	960	-90	750	750	180	10000	4600	2650	71.0 29.6
	30	650	1010	-140	750	750	180	10000	4600	2715	79.2 37.7
V Hoist = 0.8/5 m/min	32	900	1010	-140	750	750	180	10000	5100	2965	85.6 43.7
	34	900	1010	-140	750	750	180	10000	5100	2965	87.9 45.9
10 000 kg Rope hoist GM 3100 H6 FEM 2m	10	260	900	-30	750	750	170	10000	2700	1620	55.6 10.5
	14	360	900	-30	750	750	170	10000	2700	1645	60.0 12.5
	16	460	900	-30	750	750	170	10000	2900	1745	62.8 14.6
	18	460	900	-30	750	750	170	10000	2900	1745	64.5 15.7
	20	500	960	-90	750	750	180	10000	2900	1765	67.8 18.6
	22	500	960	-90	750	750	180	10000	3200	1950	71.0 21.4
	24	700	960	-90	750	750	180	10000	3800	2250	76.0 26.0
	26	700	960	-90	750	750	180	10000	3800	2250	78.0 27.8
	28	700	960	-90	750	750	180	10000	4600	2650	82.7 32.1
	30	660	1010	-140	750	750	180	10000	4600	2715	91.7 40.8
V Hoist = 0.8/5 m/min	32	900	1010	-140	750	750	180	10000	5100	2965	95.1 43.9
	34	900	1010	-140	750	750	180	10000	5100	3005	101.0 49.2
12 500 kg Rope hoist GM 5125 L6 FEM 2m	10	300	1090	40	790	790	180	10000	2700	1665	70.4 13.2
	14	400	1090	40	790	790	180	10000	2900	1765	75.8 15.5
	16	400	1090	40	790	790	180	10000	2900	1765	78.6 17.2
	18	500	1090	40	790	790	180	10000	2900	1765	81.4 19.4
	20	500	1090	40	790	790	180	10000	2900	1765	83.3 20.7
	22	700	1090	40	790	790	180	10000	3200	1950	86.4 23.2
	24	650	1140	-10	790	790	180	10000	3800	2315	91.8 28.0
	26	650	1140	-10	790	790	180	10000	3800	2315	95.9 31.7
	28	900	1140	-10	790	790	180	10000	4200	2515	103.0 37.4
	30	900	1140	-10	790	790	180	10000	4600	2715	107.0 42.0
V Hoist = 0.8/5 m/min	32	900	1140	-10	790	790	180	10000	5100	3005	114.0 47.6
	34	1150	1140	-10	790	790	180	10000	5100	3005	119.0 53.1
16 000 kg Rope hoist GM 5160 H6 FEM 1Am	10	300	1090	40	790	790	180	10000	2700	1665	87.1 15.4
	14	350	1140	-10	790	790	180	10000	2900	1830	94.7 19.1
	16	450	1140	-10	790	790	180	10000	2900	1830	97.9 21.1
	18	460	1140	-10	790	790	180	10000	2900	1865	102.0 23.4
	20	650	1140	-10	790	790	180	10000	3200	2015	105.0 26.6
	22	650	1140	-10	790	790	180	10000	3200	2015	108.0 28.3
	24	650	1140	-10	790	790	180	10000	3800	2315	113.0 32.3
	26	900	1140	-10	790	790	180	10000	3800	2315	116.0 35.5
	28	900	1140	-10	790	790	180	10000	4200	2515	119.0 37.9
	30	900	1140	-10	790	790	180	10000	4600	2755	127.0 45.2
V Hoist = 0.8/5 m/min	32	910	1140	-10	790	790	180	10000	5100	3005	133.0 51.0
	34	1100	1190	-60	790	790	190	10000	5100	3055	141.0 58.2



Load, Hoist Type ¹⁾	S ¹⁾ m	A1 mm	K1 mm	C1 mm	L1 mm	L2 mm	Z min mm	Hmax ¹⁾ mm	R mm	LK mm	Wheel loads kN R max R min
20 000 kg Rope hoist GM 6200 L6 FEM 2m	10	250	1330	-130	820	820	180	10000	2900	1830	109.0 19.7
	14	360	1330	-130	820	820	180	10000	2900	1830	116.0 21.8
	16	460	1330	-130	820	820	180	10000	2900	1865	119.0 23.8
	18	650	1330	-130	820	820	180	10000	2900	1865	123.0 26.1
	20	650	1330	-130	820	820	180	10000	3200	2015	127.0 29.7
	22	900	1330	-130	820	820	180	10000	3200	2015	131.0 32.6
	24	900	1330	-130	820	820	180	10000	3800	2315	134.0 35.0
	26	900	1330	-130	820	820	180	10000	3800	2315	139.0 39.0
	28	860	1380	-180	820	820	190	10000	4100	2515	146.0 44.9
	30	860	1380	-180	820	820	190	10000	4600	2805	152.0 51.0
V Hoist = 0.8/5 m/min	32	1100	1380	-180	820	820	190	10000	5100	3055	159.0 56.8
	34	1100	1380	-180	820	820	190	10000	5100	3055	162.0 59.7
25 000 kg Rope hoist GM 6250 L6 FEM 1Am	10	350	1330	-130	820	820	180	10000	2900	1830	132.0 22.4
	14	600	1380	-180	820	820	190	10000	3000	1930	142.0 26.3
	16	600	1380	-180	820	820	190	10000	3200	2065	146.0 29.0
	18	610	1380	-180	820	820	190	10000	3200	2065	151.0 31.9
	20	850	1380	-180	820	820	190	10000	3200	2065	154.0 33.6
	22	850	1380	-180	820	820	190	10000	3200	2065	158.0 37.2
	24	860	1380	-180	820	820	190	10000	3800	2365	164.0 41.7
	26	860	1380	-180	820	820	190	10000	3800	2365	167.0 44.0
	28	860	1380	-180	820	820	190	10000	4600	2765	174.0 50.0
	30	860	1380	-180	820	820	190	10000	4600	2805	181.0 56.9
V Hoist = 0.66/4 m/min	32	1110	1380	-180	820	820	190	10000	5100	3055	190.0 64.4
	34	930	1560	-360	820	820	270	10000	5100	3055	201.0 75.1
32 000 kg Rope hoist GM 7320 H6 FEM 2m	10	400	1460	40	1080	1080	190	8000	3400	2130	166.0 32.8
	14	600	1460	40	1080	1080	190	8000	3600	2265	179.0 34.7
	16	610	1460	40	1080	1080	190	8000	3600	2265	184.0 36.7
	18	850	1460	40	1080	1080	190	8000	3600	2265	189.0 39.4
	20	850	1460	40	1080	1080	190	8000	3600	2265	193.0 41.0
	22	860	1460	40	1080	1080	190	8000	3600	2265	198.0 44.6
	24	680	1640	-140	1080	1080	270	8000	3600	2305	207.0 51.7
	26	920	1640	-140	1080	1080	270	8000	3800	2405	213.0 56.5
	28	930	1640	-140	1080	1080	270	8000	4300	2655	220.0 62.4
	30	930	1640	-140	1080	1080	270	8000	4600	2805	225.0 65.8
V Hoist = 0.66/4 m/min	32	930	1640	-140	1080	1080	270	8000	5100	3055	234.0 73.9
	34	1180	1640	-140	1080	1080	270	8000	5100	3055	246.0 85.5
40 000 kg Rope hoist GM 7400 H6 FEM 1Am	10	220	1660	-160	1080	1080	270	8000	3600	2265	206.0 41.6
	14	430	1660	-160	1080	1080	270	8000	3600	2265	220.0 42.5
	16	430	1660	-160	1080	1080	270	8000	3600	2265	227.0 45.0
	18	680	1660	-160	1080	1080	270	8000	3600	2265	233.0 48.0
	20	680	1660	-160	1080	1080	270	8000	3600	2305	239.0 52.2
	22	680	1660	-160	1080	1080	270	8000	3600	2305	244.0 54.6
	24	920	1660	-160	1080	1080	270	8000	3800	2405	251.0 59.8
	26	930	1660	-160	1080	1080	270	8000	3800	2405	258.0 65.2
	28	930	1660	-160	1080	1080	270	8000	4300	2655	267.0 72.8
	30	930	1660	-160	1080	1080	270	8000	4600	2805	272.0 76.7
V Hoist = 0.66/4 m/min	32	1180	1660	-160	1080	1080	270	8000	5100	3055	282.0 84.9
	34	1180	1660	-160	1080	1080	270	8000	5100	3055	291.0 93.6
50 000 kg Rope hoist GM 7500 H6 FEM 1Am	10	230	1890	70	1310	1310	270	10000	4300	2615	254.0 57.0
	14	430	1890	70	1310	1310	270	10000	4300	2615	271.0 54.6
	16	430	1890	70	1310	1310	270	10000	4300	2615	280.0 56.9
	18	680	1890	70	1310	1310	270	10000	4300	2655	287.0 59.3
	20	680	1890	70	1310	1310	270	10000	4300	2655	295.0 63.8
	22	930	1890	70	1310	1310	270	10000	4300	2655	303.0 67.9
	24	930	1890	70	1310	1310	270	10000	4300	2655	311.0 74.0
	26	930	1890	70	1310	1310	270	10000	4300	2655	317.0 77.2
	28	1180	1890	70	1310	1310	270	10000	4300	2655	330.0 88.5
	30	1180	1890	70	1310	1310	270	10000	4600	2805	336.0 92.9
V Hoist = 0.5/3.3 m/min	32	1180	1890	70	1310	1310	270	10000	4700	2855	347.0 102.0
63 000 kg Rope hoist GM 7630 H6 FEM 1Am	10	420	1890	70	1310	1310	270	10600	4300	2615	312.0 66.0
	14	430	1890	70	1310	1310	270	10600	4300	2615	333.0 63.0
	16	680	1890	70	1310	1310	270	10600	4300	2615	342.0 64.0
	18	680	1890	70	1310	1310	270	10600	4300	2615	350.0 67.0
V Hoist = 0.8/5.2 m/min											

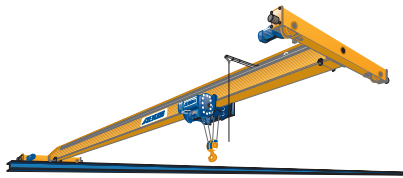

ELV/ELK Single Girder Cranes

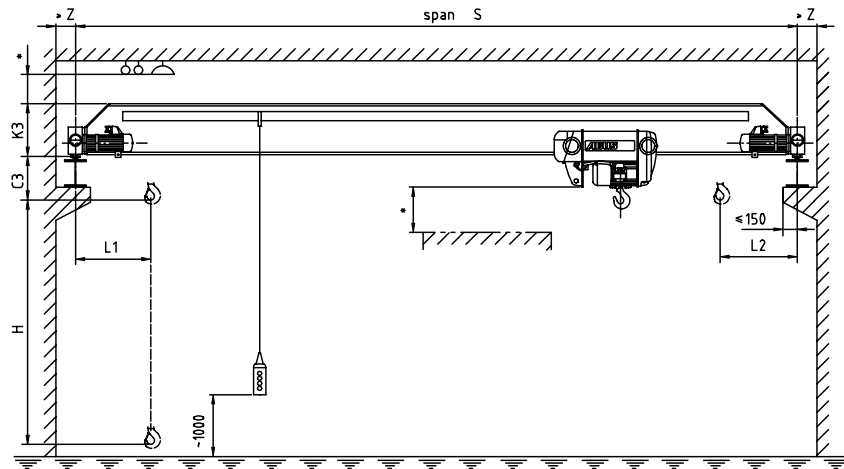


* Safety distance according to national regulations.

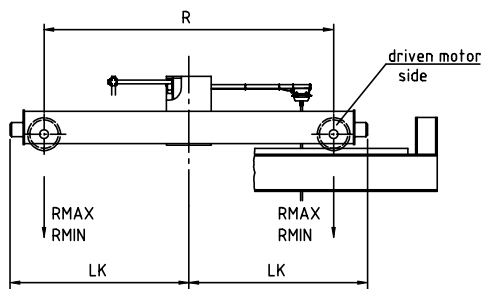


Variation 3:

The measurements K3 and C3 are ABUS standard measurements and can be changed according to the chosen main girder connection variation


For exact measurements of the Variation 1, 2, 4, 5 please contact ABUS




Variation 1:
top of the main
girder = top of the
end carriage



Variation 2:
all varieties between
variation 1 and 3



Variation 4:
bottom of the main
girder = top of the end
carriage



Variation 5:
bottom of the main
girder higher than
the top of the end
carriage but not
more than 1500 mm
between the top
of the crane rail
and the bottom of
the main girder

Dimensions of ELV/ELK Single Girder Cranes


Load, Hoist Type ¹⁾	S ¹⁾ m	K3 mm	C3 mm	L1 mm	L2 mm	Z min mm	Hmax ¹⁾ mm	R mm	LK mm	Wheel loads kN R max R min	
500 kg Chain hoist GM2 500 FEM 2m V Hoist = 1/4 m/min	5	290	490	540	440	140	8000	1900	1160	4.3	2.1
	10	290	490	540	440	140	8000	1900	1160	5.4	2.8
	15	320	490	540	440	140	8000	2200	1310	7.5	4.8
	18	420	470	540	440	150	8000	2700	1600	10.0	7.4
1000 kg Chain hoist GM4 1000 FEM 2m V Hoist = 1.3/5 m/min	5	290	520	560	450	140	6000	1900	1160	6.7	2.3
	10	290	520	560	450	140	6000	1900	1160	7.8	2.9
	15	320	520	560	450	140	6000	2200	1310	9.9	4.9
	18	420	500	560	450	150	6000	2700	1600	12.5	7.5
1600 kg Rope hoist GM 816 L6 FEM 4m V Hoist = 0.8/5 m/min	5	290	390	950	640	140	9000	1900	1160	9.8	3.1
	10	290	390	950	640	140	9000	1900	1160	11.4	3.5
	15	340	390	950	640	140	9000	2200	1330	13.7	5.4
	18	420	380	950	640	150	9000	2700	1625	16.1	7.6
2000 kg Rope hoist GM 820 L6 FEM 4m V Hoist = 0.8/5 m/min	5	290	390	950	640	140	9000	1900	1160	11.6	3.3
	10	290	390	950	640	140	9000	1900	1160	13.9	4.3
	15	360	390	950	640	140	9000	2200	1330	15.9	5.7
	18	550	380	950	640	150	9000	2700	1600	16.7	6.4
	20	650	380	950	640	150	9000	3200	1850	17.7	7.3
	22	660	380	950	640	150	9000	3200	1875	19.3	8.8
	24	760	380	970	770	170	9000	3800	2195	20.7	10.3
	26	760	430	970	770	170	9000	3800	2195	22.7	12.2
3200 kg Rope hoist GM 832 H6 FEM 2m V Hoist = 0.8/5 m/min	5	290	390	950	640	140	9000	1900	1160	17.0	4.4
	10	310	390	950	640	140	9000	1900	1160	19.7	4.9
	15	470	380	950	640	150	9000	2200	1350	22.9	7.4
	18	650	380	950	640	150	9000	2700	1600	23.2	7.4
	20	660	380	950	640	150	9000	3200	1875	24.5	8.6
	22	760	380	950	640	150	9000	3200	1875	25.7	9.7
	24	760	430	970	770	170	9000	3800	2195	28.4	12.5
	26	860	430	970	770	170	9000	3800	2195	29.6	13.7
5000 kg Rope hoist GM 1050 H6 FEM 2m V Hoist = 0.8/5 m/min	5	350	480	1030	710	150	9000	1900	1180	25.5	6.6
	10	420	480	1030	710	150	9000	1900	1200	29.6	7.0
	15	560	480	1030	710	150	9000	2200	1350	32.7	8.8
	18	660	480	1030	710	150	9000	2700	1625	33.6	9.3
	20	660	480	1030	710	150	9000	3200	1875	35.3	10.8
	22	760	480	1060	840	170	9000	3200	1895	37.0	12.6
	24	860	530	1060	840	170	9000	3800	2195	38.9	14.4
	26	1060	530	1060	840	170	9000	3800	2195	41.4	16.7

Load, Hoist Type ¹⁾	S ¹⁾ m	K3 mm	C3 mm	L1 mm	L2 mm	Z min mm	Hmax ¹⁾ mm	R mm	LK mm	Wheel loads kN R max R min	
6300 kg Rope hoist GM 2063 H6 FEM 1Am V Hoist = 0.8/5 m/min	5	370	480	1090	810	150	9000	1900	1200	30.9	8.4
	10	470	480	1090	810	150	9000	1900	1200	36.2	8.3
	15	660	480	1170	940	170	9000	2200	1370	38.3	9.1
	18	760	480	1170	940	170	9000	2700	1645	40.6	10.8
	20	760	480	1170	940	170	9000	3200	1895	42.5	12.3
	22	860	530	1170	940	170	9000	3200	1895	43.9	13.4
	24	1060	530	1170	940	170	9000	3800	2195	46.9	16.2
	26	1060	530	1170	940	170	9000	3800	2230	48.1	17.2
8000 kg Rope hoist GM 3080 H6 FEM 3m V Hoist = 0.8/5 m/min	5	550	560	1210	990	170	10000	1900	1220	37.5	11.6
	10	560	560	1210	990	170	10000	1900	1220	43.6	9.3
	15	660	560	1210	990	170	10000	2200	1395	48.0	10.9
	18	760	560	1210	990	170	10000	2700	1645	50.7	12.6
	20	760	610	1210	990	170	10000	3200	1895	53.1	14.6
	22	860	610	1210	990	170	10000	3200	1895	54.6	15.7
	24	1060	610	1210	990	180	10000	3800	2215	58.3	19.0
	26	1060	610	1210	990	180	10000	3800	2250	60.0	20.5
10 000 kg Rope hoist GM 3100 L6 FEM 2m V Hoist = 0.66/4 m/min	5	560	560	1210	990	170	10000	1900	1220	45.6	13.8
	10	560	560	1210	990	170	10000	1900	1220	52.8	10.6
	15	760	560	1210	990	170	10000	2200	1395	57.5	11.9
	18	860	610	1210	990	170	10000	2700	1645	60.8	14.0
	20	1060	610	1210	990	170	10000	3200	1895	63.4	16.1
	22	1060	610	1210	990	170	10000	3200	1895	64.8	17.0
	24	1060	610	1210	990	180	10000	3800	2215	68.6	20.4


1) Larger span cranes, other hoist specifications are available

Note 1:
The data apply to EOT cranes with power supply via energy chain system.




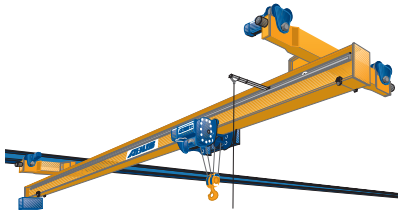

EDL Single Girder Underslung Cranes


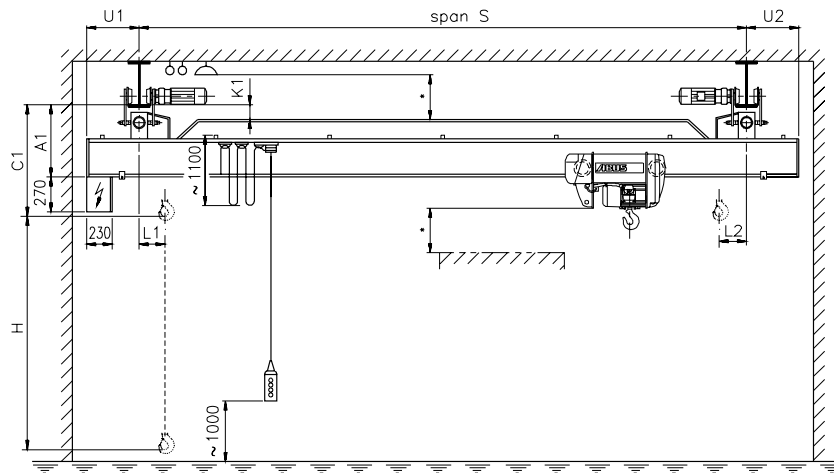


* Safety distance according to national regulations.

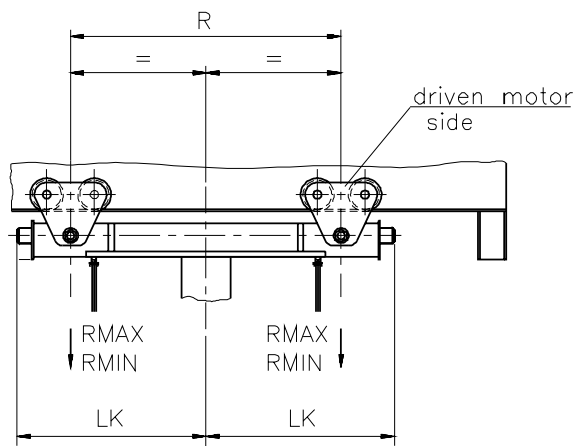

Variation 1:

The measurements A1, C1 and K1 are ABUS standard measurements and can be decreased by choosing variation 2, K1 will then increase accordingly, U1/2 has to be cut off and L1 and L2 will increase also.

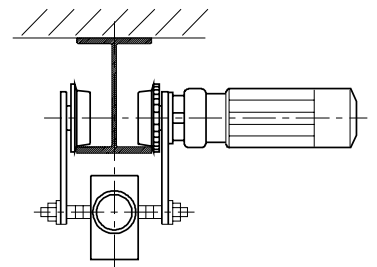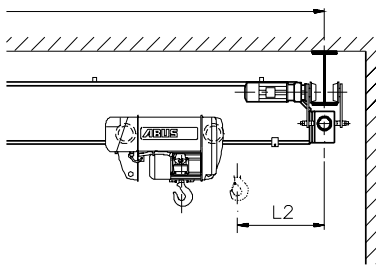

Variation 2:

bottom of the main girder = bottom of the end carriage

For exact measurements of the Variation 2 please contact ABUS

Dimensions of EDL Single Girder Underslung Cranes

Load, Hoist Type ¹⁾	S ¹⁾ m	A1 mm	C1 mm	L1 mm	L2 mm	U1/2 mm	Hmax ¹⁾ mm	R mm	LK mm	K1 mm	Wheel loads kN	
500 kg Chain hoist GM2 500 FEM 2m V Hoist = 1/4 m/min	5	390	880	-20	-250	500	8000	1500	975	170	4.6	1.6
	10	430	910	-20	-250	500	8000	1500	975	170	5.4	2.5
	12	470	950	-20	-250	500	8000	2000	1225	170	6.3	3.5
	15	390	870	-270	-500	750	8000	2500	1475	60	8.3	5.3
	17	390	870	-270	-500	750	8000	2500	1475	20	9.4	6.5
1000 kg Chain hoist GM4 1000 FEM 2m V Hoist = 1.3/5 m/min	5	390	910	-10	-250	500	6000	1500	975	170	7.3	1.4
	10	440	950	-10	-250	500	6000	1500	975	170	8.6	3.0
	12	390	910	-10	-250	500	6000	2000	1225	100	9.2	3.7
	15	390	900	-260	-500	750	6000	2500	1475	60	10.9	5.3
	17	390	900	-260	-500	750	6000	2500	1475	20	12.0	6.4
1600 kg Rope hoist GM 816 L6 FEM 4m V Hoist = 0.8/5 m/min	5	470	860	390	-40	500	9000	1500	975	170	11.3	2.1
	10	510	900	390	-40	500	9000	1500	975	170	12.7	3.6
	12	510	900	390	-40	500	9000	2000	1225	170	13.2	4.2
	15	550	930	140	-290	750	9000	2500	1475	170	15.0	5.6
	17	470	850	140	-290	750	9000	2500	1475	60	16.4	7.1
2000 kg Rope hoist GM 820 L6 FEM 4m V Hoist = 0.8/5 m/min	5	490	880	390	-40	500	9000	1500	975	170	13.4	2.2
	10	480	860	390	-40	500	9000	1500	975	170	14.8	3.7
	12	530	920	390	-40	500	9000	2000	1225	170	15.5	4.5
	15	470	850	140	-290	750	9000	2500	1475	100	17.3	5.8
	17	550	930	140	-290	750	9000	2500	1535	140	19.4	8.0

Load, Hoist Type ¹⁾	S ¹⁾ m	A1 mm	C1 mm	L1 mm	L2 mm	U1/2 mm	Hmax ¹⁾ mm	R mm	LK mm	K1 mm	Wheel loads kN	
3200 kg Rope hoist GM 832 H6 FEM 2m V Hoist = 0.8/5 m/min	5	460	840	390	-40	500	9000	1500	975	170	19.4	2.3
	10	520	900	390	-40	500	9000	1500	975	170	21.4	4.4
	12	570	950	390	-40	500	9000	2000	1265	160	23.2	6.2
	15	570	950	140	-290	750	9000	2500	1535	110	25.4	7.8
	17	570	950	140	-290	750	9000	2500	1535	60	26.7	9.3
5000 kg Rope hoist GM 1050 H6 FEM 2m V Hoist = 0.8/5 m/min	5	620	1100	480	30	500	9000	2000	1265	250	30.2	4.3
	10	560	1040	480	30	500	9000	2000	1285	140	32.7	6.6
	12	560	1040	480	30	500	9000	2000	1285	140	33.5	7.3
	15	570	1050	230	-220	750	9000	2500	1535	10	35.9	8.8
	17	570	1050	230	-220	750	9000	2500	1535	-40	37.2	10.3
6300 kg Rope hoist GM 2063 H6 FEM 1Am V Hoist = 0.8/5 m/min	5	580	1060	580	130	500	9000	2000	1265	200	36.7	5.2
	10	570	1050	580	130	500	9000	2000	1285	10	39.6	7.3
	12	570	1050	580	130	500	9000	2000	1285	-40	40.9	8.4
	14	570	1050	580	130	500	9000	2000	1285	-40	41.9	9.3
	16	580	1050	330	-120	750	9000	2500	1535	10	44.6	10.9
8000 kg Rope hoist GM 3080 H6 FEM 3m V Hoist = 0.8/5 m/min	5	640	1200	620	180	500	10000	2000	1265	170	45.9	6.4
	8	630	1190	620	180	500	10000	2000	1285	20	47.9	7.2

1) Larger span cranes, other hoist specifications are available

Note:
All data refers to cranes fitted with the festoon cable method of cross bridge power supply.



Special building characteristics often require a special crane design. ABUS overhead travelling cranes provide an optimal solution where the building structures make the normal travelling cranes less suitable. The main feature is that the crane track is not fastened to pillars but to the ceiling of the building. Over and above these special requirements the ABUS overhead travelling crane DLVM/EDL offers the advantage of very small trolley approach dimensions and as a result an optimal utilisation of the building width.

The whole production process is aimed at long-term quality. Here the rust is removed from robust main girder profiles of the EDL at the beginning of the production process using mechanical shot blasting.



ABUS in operation:
We would like to exceed your expectations



Australia – Eilbeck Cranes

6 Moorlands Road · Ingleburn NSW 2565 · Ph. 61 (0)2 9829 3700 · fax 61 (0)2 9829 3500 · e-mail: t.eilbeck@eilbeckcranes.com.au
23 Jackson Street · Bassendean WA 6054 · Ph. 61 (0)8 9279 4800 · fax 61 (0)8 9378 3689 · e-mail: j.hodges@eilbeckcranes.com.au
12 Sudbury Street · Darra QLD 4076 · Ph. 61 (0)7 3271 3790 · fax 61 (0)7 3271 3791 · e-mail: p.durrington@eilbeckcranes.com.au

Australia – Modular Cranes

33 Colbert Road · Cambellfield VIC 3061 · Ph. 61 (0)3 9357 9877 · fax 61 (0)3 9357 9822 · e-mail: tony@modularcranes.com.au

New Zealand – Baker Cranes

10 Aerovista Place · Wiri, Auckland · Ph. 64 (0)9 277 0736 · fax 64 (0)9 277 0736 · e-mail: baker.c@extra.co.nz

Vietnam – AVC

206 Road · Lac Hong Commune · Van Lam District · Hung Yen Province · Vietnam
Ph. 84 321 980 410 · fax 84 321 980 411 · e-mail: avc-abus@hn.vnn.vn